


P1,P2: M-Y266A
M-266A


Customer No: No.4



P1	P2	Color
1	1	RED
3	3	WHITE
2	2	SHIELD
4	4	GREEN
6	6	WHITE
5	5	SHIELD
7	7	BLUE
9	9	WHITE
8	8	SHIELD
10	10	BROWN
12	12	WHITE
11	11	SHIELD
13	13	BLUE
14	14	YELLOW
15	15	ORANGE
16	16	WHITE
17	17	PURPLE
18	18	RED
19	19	GREEN
SHIELD	SHIELD	

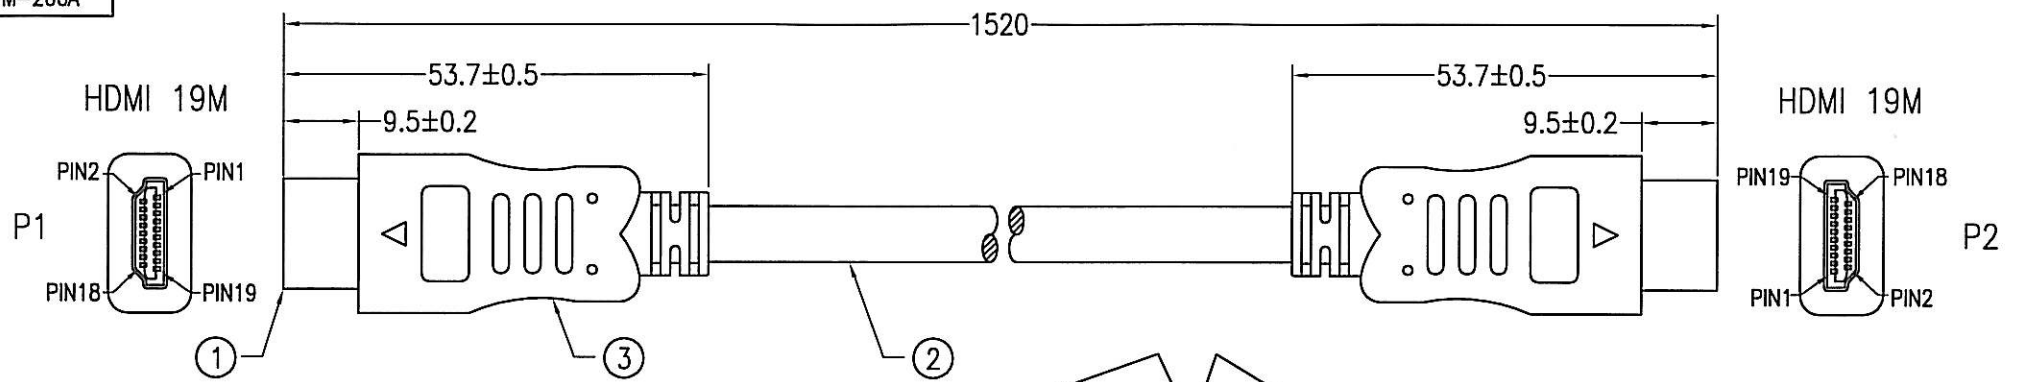

PACKING: 1PCS IN A POLYBAG

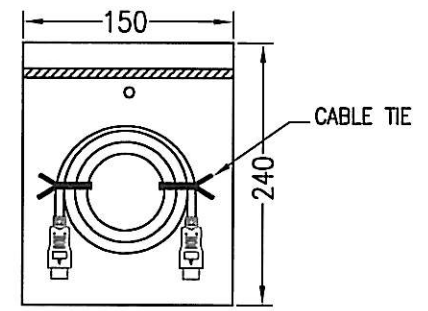

NOTE: All relevant materials are complied with RoHS directive .

3	BLACK HEAT SHRINK TUBE ϕ 2.5*8mm	8	M743	
	BLACK HEAT SHRINK TUBE ϕ 0.8*20mm	8	M743	
	COPPER FOIL 33*60mm	2	M309	
	MOLDED PE COLOR TRANSPARENT		M280	
	MOLDED PVC BLACK		M304	
2	UL20276 [(30AWG*1Pair+AL+D+M)*4Pcs+(30AWG*1Pair)+(30AWG*5C)]+AM+AMA BRAID HDMI CABLE, OD 5.5mm, JACKET BLACK, DRAWING NO. EAAB3004P3001P3005C-323	1500mm	M304	
1	HDMI 19 MALE, GOLD PLATING 15 μ " ON CONTACTS&GOLD CONNECTOR, BLACK INSULATOR(51S019P-324F-B-SE R-S151S-42)	2set	M24	
No.	DESCRIPTION	Q'TY	Supplier	
APPROVED	JIROTECH INC.	Cable Length Unless Other Spec. Tolerances:		
CHECKED		HU	0 ~200mm \pm 10mm	201~1000mm \pm 20mm
DRAWING		David	1001 ~1500mm \pm 25mm	1501~2100mm \pm 30mm
DATE		01/APR/11	2100mm \pm 40mm	
ITEM NO.	PTL-HDMI-1.5	UNIT:mm		

CHECKED