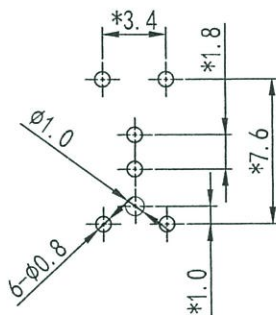

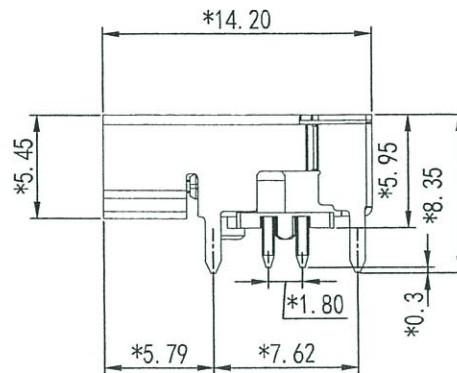
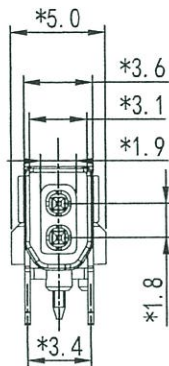


RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.PCB Layout
Component Side ShownSPECIFICATION NOTES:ELECTRICAL:

1. VOLTAGE RATING : 60 VDC MAX.
2. CURRENT RATING : 4 AMP.
3. CONTACT RESISTANCE : 20MΩ MAX.
4. INSULATION RESISTANCE: 1000 MΩ MIN. AT 500V DC

MECHANICAL:

1. INSULATOR: PA9T UL94V-0 BLACK
2. CONTACT MATERIAL : PHOSPHOR BRONZE
3. PLATING GOLD PLATING 30U AT MATING AREA, MATTE
4. SHIELD STAINLESS STEEL PLATED MATTE TIN OVER NICKEL.

ENVIRONMENTAL:

1. STORAGE: -40° C TO +85° C R/H<80%
2. OPERATION: -40° C TO +85° C.

MATES WITH MODULAR CONFORMING TO IEC-63171-2 ED. 2.0.

PART NUMBER: PTL-SPE-J-X

1-3u" 2-6u"
3-15u" 4-30u"
5-50u" 7-Fu"

△ X0	0009000	NEW DESIGN		Hunter	030524
MARK	ECN-NO.	REVISION RECORD		DRAWN	DATE
PortLinks Series Mayclean.Co.,Ltd.		UNLESS OTHERWISE SPECIFIED TOLERANCE	SCALE	CHECKED	
		Dimension Range Tolerance	1/1	APPROVED	
		X.X ±0.20	UNIT		
		X.XX ±0.15	mm		
Material/Plated/Notes		X.XXX ±0.10	SIZE	A3	SHEET 1/1
SEE NOTE		ANGLE ±5°	NAME		
PART NO.		SEE NOTE		REV.	
DOC. NO.				0	

Design drawing